



Conveyor
Application
Systems

RL26HD



The CAS®RL26HD Reloader has gone through an extensive evolution to become the robust, material hungry reloading beast it has become. The RL26HD Reloader coupled with the CAS® AT7 provides a continuous loading system that will challenge the haul trucks to keep it fed. The extreme versatility and portability of this Reloader is second to none!

CAS® QUALITY

All CAS® Slingers are made in the U.S.A.

- The heavy-duty industrial RL26HD Reloader is the **ONLY** of its kind to proudly wear the designation, **Made in the USA**. With manufacturing and service facilities in Indianapolis, IN and Eugene, OR, which is where CAS® Slingers have been manufactured since 2004. CAS® locations are strategically located to support our customers.

SLINGER INNOVATION

A decade plus worth of innovated refinements upon a proven design, is today's RL26HD!

- Can be hitched directly to the CAS® AT7 for continuous loading capabilities.
- Loadable by any standard dump/haul truck.
- Cutting-edge design virtually eliminates material waste/cost.
- Setup and take-down takes just a few minutes.

RL26HD DURABILITY

- Heavy-duty steel construction.
- Extreme durability - Can withstand 4-plus tons of material being continuously dropped.
- Off-Road capable.
- Durable 10' wide hydraulically-controlled folding clamshell hopper

CAS® PERFORMANCE

- 48" Feed belt (smooth or cleated).
- Mobile-Easy towed.
- 10'-13' Height adjustability.
- Amazing versatility! One Reloader for all materials!



The RL26HD keeps my AT7 continuously loaded, eliminating downtime!



This Reloader is a Beast!!

CAS® Slingers do the work, so you don't have to!




Conveyor Application Systems




888-279-4227



www.slingers.com

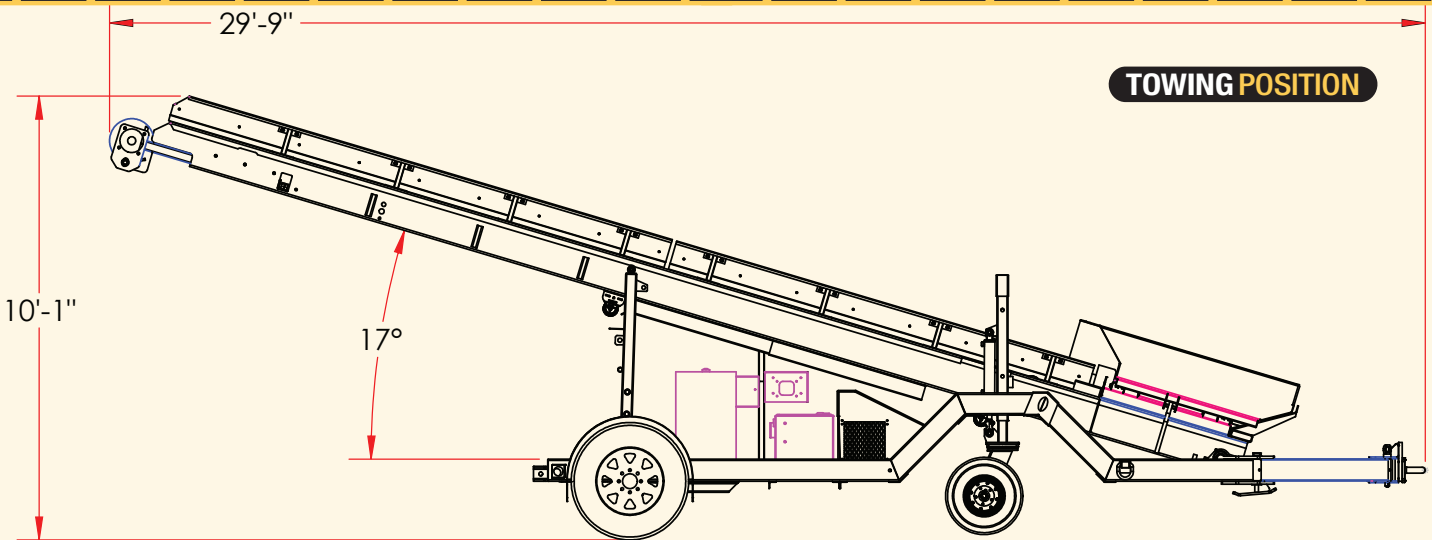

TOWING POSITION

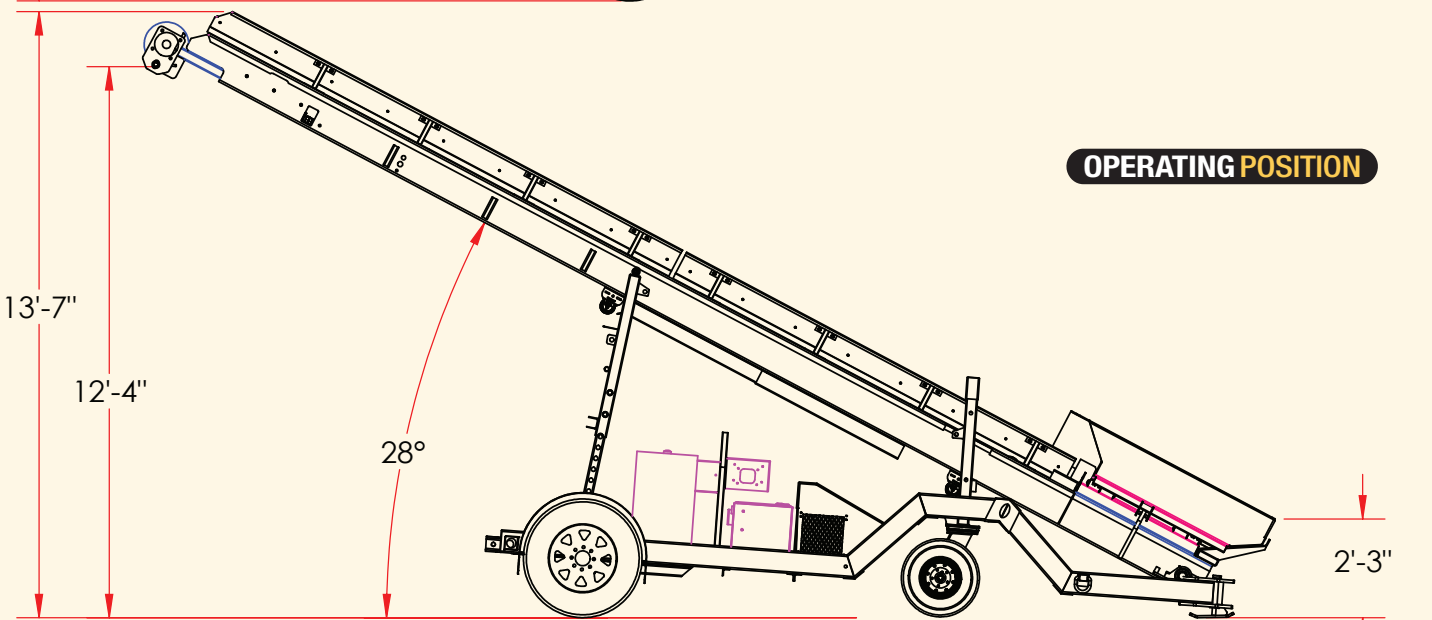

OPERATING POSITION

CHASSIS AND FRAME:

- CAS® quality heavy-duty steel construction.
- Built in the U.S.A.
- Powder-coated.

ENGINE & DRIVE TRAIN:

- Engine-
 - Yanmar® Tier IV Interim Liquid Cooled Turbo Diesel Engine.
 - Maximum output: 68.5 HP @ 2,500 rpm.
- Drive train:
 - No drive.
- Main feed belt:
 - Direct hydraulic drive.

STEEL HOPPER:

- Heavy-duty steel sheeting.
- Fully powder coated finish- interior & exterior for durability.
- 9'5" Wide winged clamshell hopper.

FEED CONVEYOR:

- CAS® heavy-duty abrasive & impact resistant belt.
 - Feed belt.
 - Smooth or cleated.
- Hydraulically powered.
- Height adjustable.

WEIGHT & DIMENSIONS (all weight is approximate):

**Specifications may vary depending on options/package choices.*

- Clearance height:
 - 13' 7" @ 28 degree angle.
- Tow height:
 - 10' 1"
- Overall length:
 - 26'
- Tow length:
 - 29' 9"
- Tow weight:
 - 10,000 lbs.

ELECTRICAL SYSTEM (12 or 24 VDC):

- Yanmar CANplus® 600 Electronic Engine Controls.

PRODUCTION:

- **Production volume varies widely depending upon material.*
- 4-6 Tons of 1" rock per minute.*
- 10-15 Yards of organic material per minute.*



CAS® Slingers do the work, so you don't have to!