

## THE ULTIMATE SLINGER TRUCK

The FatBoy is the only dual-purpose work truck on the market. It is a slinger and a dump truck in one. It is the highest volume slinger in its class with the ability to place the widest variety of materials with ease thanks to its zero-degree feed floor. A true live bottom dump truck that can bulk offload the entire truck as quickly as a traditional dump truck.

VOLUME  
**4 Yards/Min**

SLINGING DISTANCE  
**130'**

CAPACITY  
**22-40 Yards**

TWO WAY  
**90° REAR GATE**  
W/ Full Dump Capabilities

400  
**HARDOX**  
Steel


22 | 24 | 27  
**YARD CAPACITY**  
Hopper

PATENTED  
**3 WAY PIVOT**  
and Worm Gear

16"  
**IMPACT RESISTANT**  
PC Belt

**ZERO DEGREE  
FEED FLOOR**  
Eliminates Bridging



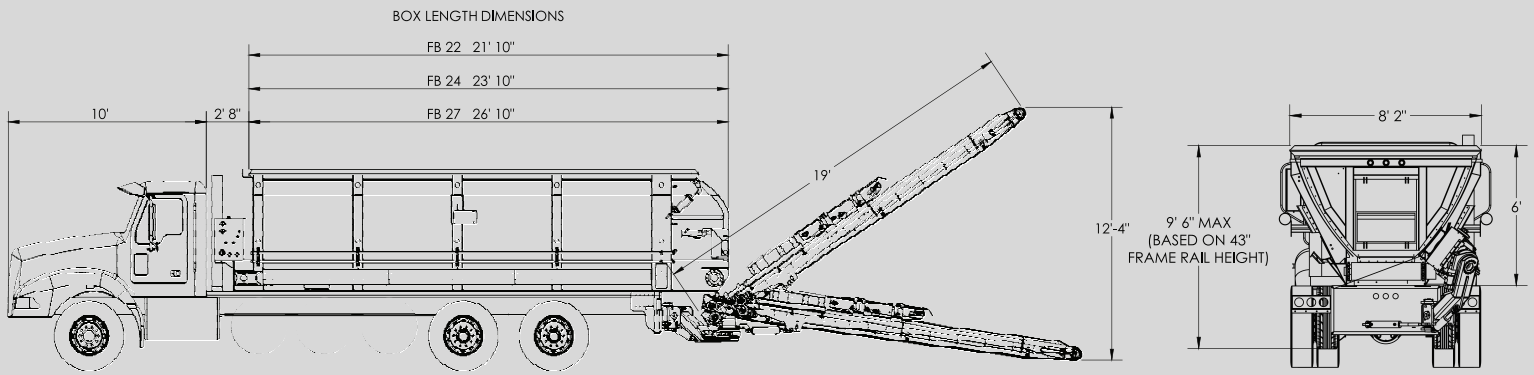

# FATBOY

## Chassis & Body:

- \*Chassis is customer specified
- Weight: Starting at 12,500 lbs.

Body Available in 3 Models:

- **FB22**  
Capacity: 22 cu. yards  
Length: 21' 10" Width: 8' 2" Height: 6'
- **FB24**  
Capacity: 24 cu. yards  
Length: 23' 10" Width: 8' 2" Height: 6'
- **FB27**  
Capacity: 27 cu. yards  
Length: 26' 10" Width: 8' 2" Height: 6'

## Hopper Body

- Trout River™ Triple Walled HARDOX™ Steel Box
  - Inner Layer - HARDOX™ 400 Steel
  - Middle Layer - Insulation
  - Outer Layer - Stainless Steel or Brushed Aluminum
- Asphalt Rated
- Virtually No Bridging
- Hydraulically Powered Two-Way 90° Rear Gate with Full Dump Capabilities
- Access Ladder & LED Lighting System with Rear Safety Strobe Light

## High Performance Hydraulic System

- High-Pressure PTO Mounted Load Sensing Piston Pump Integrated with HAWE Componentry Rated up to 6,000 PSI.
- Pressure & Return Filtration Systems
  - Pressure Filter Rating: 10 Microns
  - Return Filter Rating: 3 Microns
- HAWE Proportional Valves

## Feed Conveyor:

- Heavy-Duty 32" Abrasive & Impact Resistant Belt
- Zero-Degree Incline Feed Floor
  - Decreases Bridging and Increases Pulling Power
- HD 3" Pitch RS-3415 Chain
  - Up to 120,000 lbs. Pulling Strength
- Chain Lubrication System
- Asphalt Rated

## Placing Conveyor:

- Heavy-Duty 16" Abrasive & Impact Resistant Belt with 1/2" Cleats
- Heavy-Duty Steel Design
- Hydraulic Drive Super-Shield™
- Patented 3 Way Pivot and Worm Gear
- Deflector Shield - Spreading Attachment
- High Performance Tail Mounted Direct Drive

## Performance Specifications

- Volume: Up to 4 Yards Per Minute
- Distance: Up to 130'

## Electrical System:

12 or 24 VDC

- OMNEX Radio & Receiver Control Package
  - Wireless Remote Controlled Placing
  - Maximum Effective Range: 900' @ 2.4 GHz
- Equipped with Frequency Hopping Spread Spectrum (FHSS) Technology
  - Frequency Hopping @ 50 Non-Overlapping Channels in 100kHz Intervals (100,000 Times per Second)

## Optional:

### Chassis & Body

- Rear Fenders: Aluminum or Stainless Steel
- Tool Box: Aluminum or Stainless Steel
- Remote Control/Wireless Ground Drive System

### Hopper Body

- Outer Layer: Stainless Steel or Brushed Aluminum
- Vibrator
- Air System with Hose Reel
- Tarp: Electrical Cable Slide or Swing Arm System
- Adjusted Side Rail Height to 7' Sides
  - Increases Volume 10-13 Yards
- Motion Alarm

### Placing Conveyor

- Performance Package: Dual Super-Shields™
- Trenching Attachment