

EXTEND ON-SITE PERFORMANCE

Introduce a CAS® Reloader into your fleet and you will see dramatic increases in equipment efficiency and productivity with significant decreases in manpower and assets required to complete a job. Built with extended reach to front load in-line chassis mounted slingers and blower trucks.

EXTENDABLE

34 FEET

Operating Length for
Cab-Over Loading

36"

IMPACT RESISTANT

Belt

10' 7.5"

CROSS-FEED

Hopper

LIQUID COOLED

TURBO DIESEL


Engine

YANMAR

CANplus® 600

Electronic Engine Controls



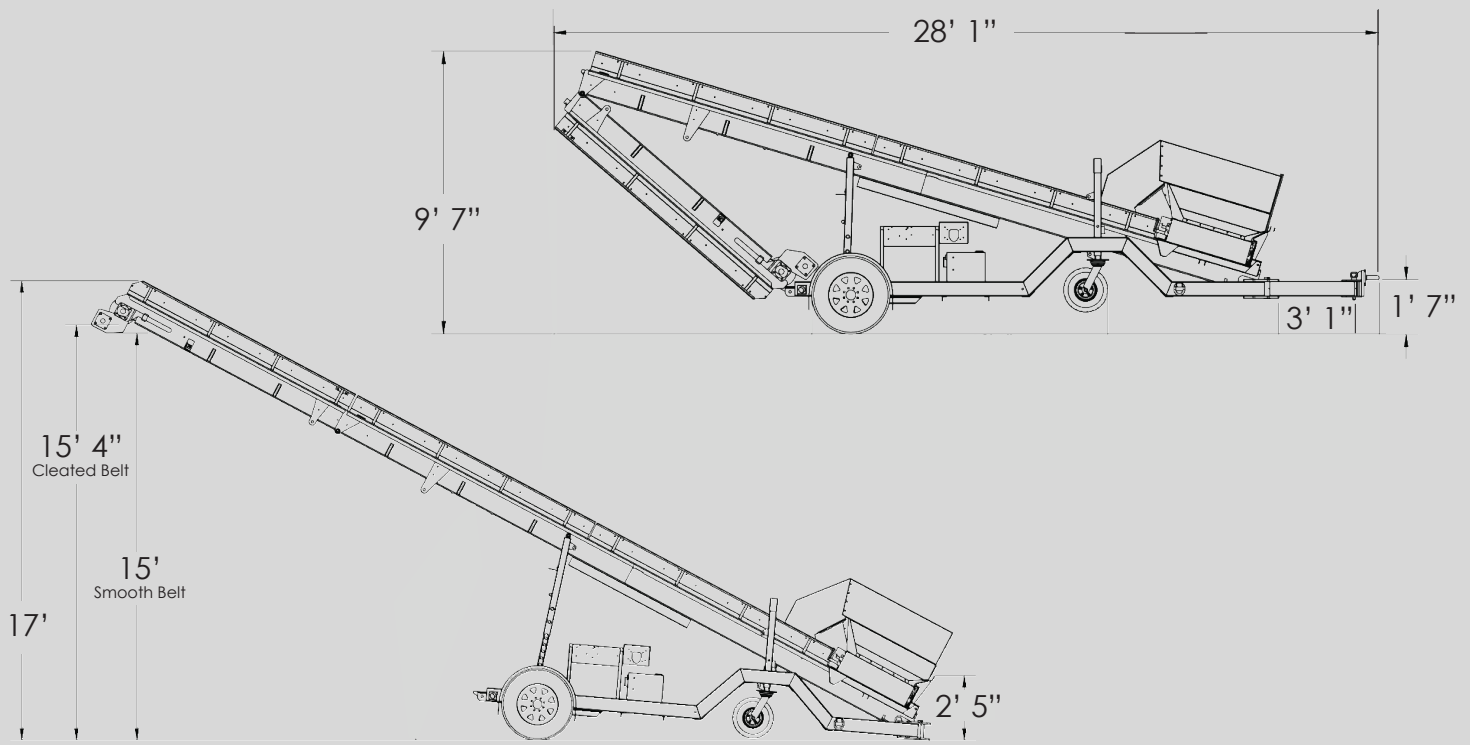

RL34

Chassis & Frame:

- Quality Heavy-Duty Steel Construction
- Powder Coated
- Built in the USA

Engine:

- Engine -
- Yanmar® Tier IV Liquid Cooled Turbo Diesel Engine
 - Maximum Output: 68.5 HP @ 2,500 RPM

- Main Feed Belt
- Direct Hydraulic Drive

Production:

- *Volumes vary upon material
- 4-6 Tons of 1" Rock per Minute
 - 6-10 Yards of Organic Material per Minute

Steel Hopper:

- Heavy-Duty Steel Sheeting
- Fully Powder Coated
- 10' 7.5" Wide Cross-Feed Hopper

Feed Conveyor:

- Heavy-Duty Abrasive & Impact Resistant Belt
- 36" Feed Belt [Smooth or Cleated]
- Hydraulically Powered
- Height Adjustable

Weight & Dimensions:

*Specifications may vary upon options/packages

- Tow Weight
- Approx. 10,000 lbs

- Tow Length
- 28' 1"

- Operational Length
- 34'

- Tow Width
- 8' 6"

- Tow Height
- 9' 7"

- Operational Clearance Height
- 15' 4"

Electrical System

- 12 or 24 VDC
- Yanmar CANplus® 600 Electronic Engine Controls